

BNO080/BNO085

9-AXIS SYSTEM IN PACKAGE (SiP) IMU

Our BNO080/BNO085 SiP (System-in-Package) is perfect for robotics, AR/VR, HIDs (Human Interface Devices, such as remote controls) and other motion-sensing applications. Leveraging our advanced sensor fusion software and a Bosch Sensortec sensor, this powerful platform is highly flexible, and we'll work with your technology teams so you can easily configure it to bring out the best in your product.

The BNO085 delivers high performance, shortens development times and simplifies BOMs by combining a 9-axis sensor (AGM) with sensor fusion capabilities in a single package. By addressing popular sensor anomalies with proprietary algorithms that are continually perfected through rigorous testing, our motion sensors deliver more accurate dynamic heading than the competition. We've built a deep and flexible sensor platform so you can pick what works best for you – stay focused on innovating in other product areas while speeding time to market. Leave the sensor fusion to the experts.




FEATURE HIGHLIGHTS

- ✔ MotionEngine™ 9-Axis and 6-Axis Sensor Fusion – Provides raw, calibrated sensor orientation data for more accurate heading and orientation
- ✔ Intelligent Power Management – Manages sensor states to conserve power without sacrificing quality of motion data
- ✔ Calibration – Supports both dynamic and factory-based calibration to deliver the highest performance
- ✔ Always-on Capabilities – Includes software to enable low power, step counter and gesture recognition
- ✔ Control via I2C, SPI or UART Interfaces – Freedom to optimize overall circuit design requirements
- ✔ Secondary I2C interface – Allows attachment of additional environmental sensors
- ✔ OS Independent – Driver example code available for ease of integration
- ✔ Compatibility – BNO085 is backwards compatible with BNO080, and both are a pin-for-pin replacement for Bosch Sensortec's BNO055 and BMF055
- ✔ Software Library Support – Includes support for external MotionElements software libraries for advanced applications such as 6DOF VR controllers and attitude monitoring (e.g., antennas) *BNO085 only

PHYSICAL ATTRIBUTES

SOFTWARE	 Hillcrest Lab's advanced sensor fusion software
SENSORS	 accel  gyro  mag
PROCESSOR	 ARM Cortex-M0+
INTERFACES	I2C SPI UART

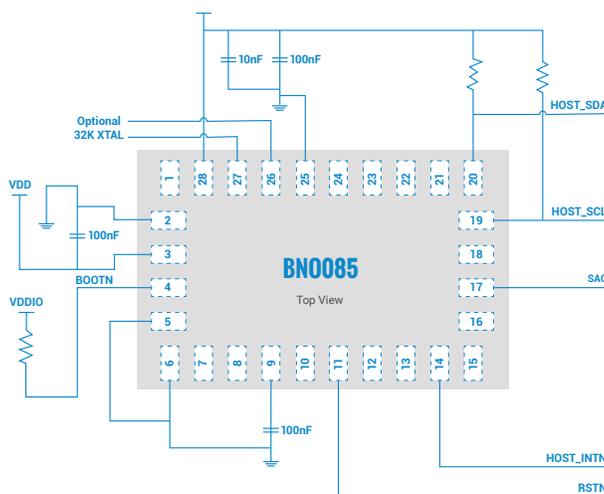

BNO080/BNO085

9-AXIS SYSTEM IN PACKAGE (SIP) IMU

 AR/VR	ROBOTICS 
<p>The BNO080/BNO085 delivers more accurate orientation information with low latency – even during rapid motion – eliminating motion sickness and other negative user experiences. Low power consumption, predictive motion, high output rate (1kHz), and compact size (5.2 x 3.8 x 1.1 mm³) all make the BNO080/BNO085 ideal for VR/AR devices such as HMD (head mounted displays), glasses and controllers, where both power and space are at a premium.</p> <p>Our MotionElements software combines camera data with the BNO085 sensor data to deliver a more cost-effective 6DOF controller experience.</p>	<p>The BNO080/BNO085 is optimized for service robots that employ Simultaneous Localization and Mapping (SLAM) or other “intelligent” navigation solutions, such as robotic vacuum cleaners.</p> <p>Our combination of proprietary sensor fusion software and multi-axis sensors delivers superior heading performance, even when the robot runs over uneven surfaces, such as a floor transition from one material to another. Whether your robot cleaner relies mainly on an IMU for navigation or leverages an IMU to complement a LiDAR, VSLAM system or optical sensor (optical flow), our products will help you meet your requirements.</p>
Features & Benefits	Features & Benefits
<ul style="list-style-type: none">  1KHz Sample Rate – Enables flawless, smooth head-tracking with low latency and support for time-warping for immersive experiences  Predictive Head Tracking and AR/VR Stabilization – Adjusts angular position gradually over time to avoid “jumps” and compensate for system latency  Enhanced Controller Tracking (BNO085 only) – Utilizes camera data to significantly improve VR controller performance  Tare – Allows for arbitrary mounting of the BNO080/BNO085 in the end product  Context and Activity Tracking – Step-based activity features for head-mounted devices, including stationary, running, walking and step count 	<ul style="list-style-type: none">  Accurate Heading Angle – Less than 0.5°/min typical error rate  Tilt Independent Heading – Allows for proper heading output when surface is uneven  Bump Detection – Calibrated accelerometer output provides data to support a bump detection algorithm without having to use a separate sensor  Inclination Detection – Provides full 3DOF robot orientation, allowing detection of surface and device issues

ABOUT CEVA

CEVA is the leading licenser of wireless connectivity and smart sensing technologies. We offer Digital Signal Processors, AI processors, wireless platforms and complementary software for sensor fusion, image enhancement, computer vision, voice input and artificial intelligence, all of which are key enabling technologies for a smarter, connected world. We partner with semiconductor companies and OEMs worldwide to create power-efficient, intelligent and connected devices for a range of end markets, including mobile, consumer, automotive, robotics, industrial and IoT. Our ultra-low-power IPs include comprehensive DSP-based platforms for 5G baseband processing in mobile and infrastructure, advanced imaging and computer vision for any camera-enabled device and audio/voice/speech and ultra-low power always-on/sensing applications for multiple IoT markets. For sensor fusion, our Hillcrest Labs sensor processing technologies provide a broad range of sensor fusion software and IMU solutions for AR/VR, robotics, remote controls, and IoT. For artificial intelligence, we offer a family of AI processors capable of handling the complete gamut of neural network workloads, on-device. For wireless IoT, we offer the industry’s most widely adopted IPs for Bluetooth (low energy and dual mode), Wi-Fi 4/5/6 (802.11n/ac/ax) and NB-IoT.

© Copyright 09/2019 CEVA, Inc. and/or its subsidiaries. All rights reserved. All specifications are subject to change without notice.

